


# EESVN55Q


L70  
25°C

219,000 Hours

## Amber LED Garage Lighter



TURTLE-SAFE

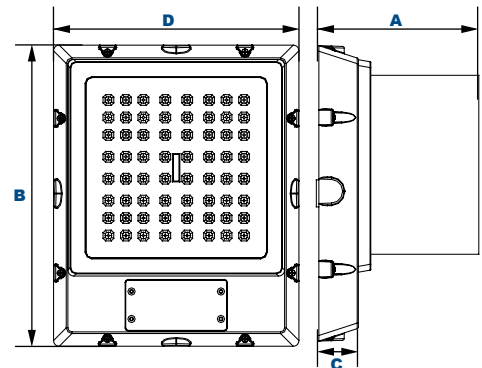

### Dimensions

Width (D)	11¼" (285mm)
Length (B)	13¾" (350mm)
Height 1 (A)	7½" (193mm)
Height 2 (C)	1⅞" (47mm)

The EnviroLux Amber LED EESVN55Q luminaire is available with a shielded IES Type V distribution, and is certified by the Florida Fish & Wildlife Conservation Commission (FWC) for wildlife applications that are directly visible from the shore requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required by FWC. Typical applications include retail centers, hotels, residential covered parking areas, parks, schools and universities, office buildings and medical facilities. Mounting heights of up to 12 feet can be used based on light level and uniformity requirements

### Specifications and Features:

#### Housing:

Low Profile Die Cast Aluminum Housing, ½" Coin Plugs with O-rings for Conduit or External Sensor. Built-in Sensor Housing with Color-Matched Polycarbonate Cover. A Clear Cover will be Provided When a Sensor is Ordered. Includes Full Baffle Required to Maintain FWC Certification.

#### Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750.  
(Damp Locations When Used with VNQM.); IP66 Sealed LED Compartment.

#### Finish:

Textured Architectural Bronze or White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

#### Lens:

Molded UV-Resistant Acrylic Optical Lens Designed for Garage Lighting Applications.

#### Mounting Options:

Included Easy-Hang Bracket Fits Standard 4" Electrical Box, Allowing One-Person Installation. Optional Quick-Mount/Pendant Bracket Available.

#### AmberLED:

Aluminum Boards

#### Wattage:

39w: Array: 39w, System: 43.4w;  
52w: Array: 52w, System: 57.2w; (Up to 175w HID Equivalent)

#### Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

### Order Information Example:

EESVN55QF1X52UAMZSPBF

EESVN55Q	F		U	AM			BF
Model	Optics	Wattage	Driver	CCT	Color	Options	Shield
EESVN55Q	F=Type V	1X39=39w 1X52=52w	U=120-277V	AM=Amber	W=White Z=Bronze C=Custom (Consult Factory)	SF=Single Fuse DF=Double Fuse SP=Surge Protection PC1=Photocell, 120VAC PC2=Photocell, 250-305VAC S2=Microwave Sensor with Dimming for Mounting Heights of 8 to 40' QM=Quick Mount/Pendant Mount BU=Battery Backup, 90 Minutes	BF=Baffle

### Project Information:

Project Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

Complete Catalog #: \_\_\_\_\_ Date: \_\_\_\_\_

Comments: \_\_\_\_\_

### Certification & Listings:



### Accessories & Replacement Parts:




### Replacement Parts (Order Separately, Field Installed)

VNQM	Hinged Quick-Mount Bracket, Stamped Steel, Mount Over Recessed Electrical Box, or Use 3/4" NPS Downrod for Pendant Mounting. CSA Listed for Damp Location Mounting.
PC1	120VAC, Photocell
PC2	250-305VAC, Photocell
P17117	Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz.

For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

### Photometric Data

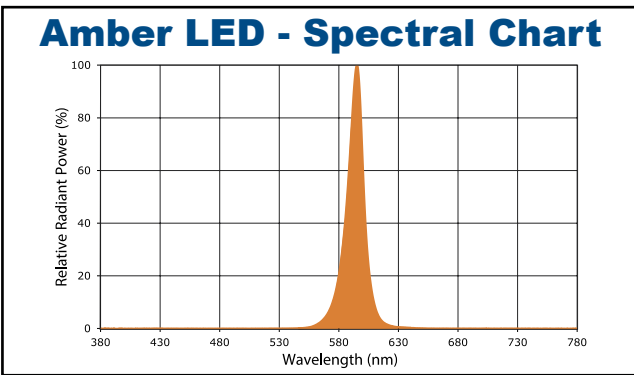

### Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	AmberLEDs	
				Lumens	LPW
AmberLED 39w	117	43	Type V	4,207	103
AmberLED 52w	117	57	Type V	5,577	103

### Projected Lumen Maintenance

Data shown for AmberLED	Input Watts	Initial	Compare to MH			
			25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
TM-21-11						
<b>L70 Lumen Maintenance @ 25°C / 77°F</b>	57	1.00	0.97	0.93	0.86	219,000
TM-21-11						
<b>L70 Lumen Maintenance @ 50°C / 122°F</b>	57	1.00	0.96	0.91	0.82	114,000
TM-21-11						
<b>L80 Lumen Maintenance @ 40°C / 104°F</b>	57	1.00	0.95	0.89	0.78	93,000

**NOTES:**

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 117mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.