

Project Information	
Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	



The EnviroLux Large 62 watt Full Cutoff Wall Pack luminaire is designed to replace HID lighting systems between 200w to 4000w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 10 to 24 feet can be used based on light level and uniformity requirements.

SPECIFICATIONS AND FEATURES:

EnviroLux LED Engine:

201LPW, 83CRI, Silicone Coated Aluminum Core Boards - Water and Humidity Proof

HOUSING:

Die Cast Hinged and Gasketed Aluminum Front Frame and Housing with 1/2" Coin Plugs. Nickel-Plated Stainless Steel Hardware. Photocell Adaptable.

WATTAGE:

62W=Array: 62 System Watts: Lumens - **11,838** (250-400W HID or Induction Equivalent.)

FINISH:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

DRIVER:

Programmable Driver, 120-277V, 50/60Hz; Dimmable Driver.

LENS:


Tempered Clear Flat Glass Lens or Tempered Clear Flat Prismatic Glass Lens.

Listing and RATINGS:

CSA Listed. Operating in Ambient Temperatures: -40°C to + 50°C IP67 Sealed LED Compartment.

MOUNTING OPTIONS:

Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit.

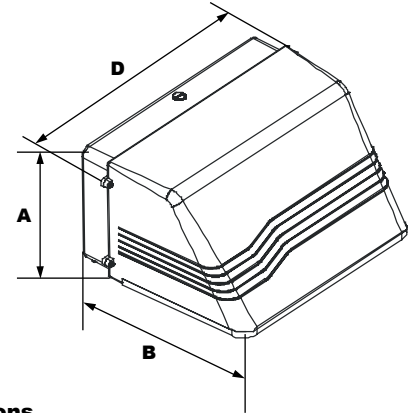

Dimensions

Width (D)	18 1/4" (464mm)
Length (B)	13 3/4" (349mm)
Height (A)	9 1/8" (232mm)

EnviroLux 62 Watt LED Large Full Cutoff Wallpack



Scan to watch our Made in USA video


Model	Part Suffix	Driver	Wattage	CCT	Lens	Mounting	Options
EES	WPC20-LED-PS	UNV=120-277V	62w	2700K 3000K 3500K 4000K 5000K	FG=Flat Glass	Does not apply	<p>LWPFCWG=Wire Guard LWPFC=Full Cutoff LWPSCS=Side Cutoff LWPVS=Vandal Shield M1=Motion Sensor, IR for mounting heights of 20ft to 35ft M2=Motion Sensor, IR for mounting heights of 18ft or less EMB=Batory Backup PC=Photo Cell 120-277 Unifi=EnviroLux Wireless 480V=480 Volt</p>



EnviroLux Unifi Mesh Passport can operate up to 500 fixtures on a wireless network from anywhere in the world.



EnviroLux Large Full Cutoff Wallpack Options



LWPCOVS



LWPCOWG

Accessories (Order separately, Field installed)

LWPCOVS	Clear Polycarbonate Vandal Resistant Guard, Includes Hardware.
LWPCOWG	Wire Guard, Stainless Steel Construction, Includes Hardware.

Replacement Parts (Order separately, Field installed)

LWPCOGL	Tempered Clear Flat Glass Lens.
LWPCOGLP	Tempered Prismatic Flat Glass Lens.
PC	120V-277AC, Photocell